




WWW.SHAMLANGROUP.COM

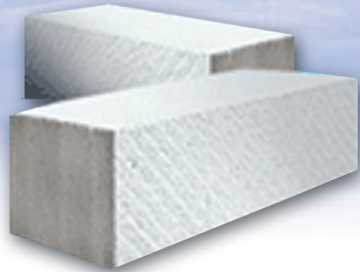

PAC BLOCK

Features and Benefits

- Up to 4 times lighter than concrete
- Recyclable, inert, non-toxic
- Structural & fire resistant building block
- Thermal insulator, reduces thermal bridging
- Save up to 60% of power consumption
- Improves building operating costs
- Contractor-friendly installation

AL-Shamlan Insulating Block

We are expert and specialists are our most valued asset

Material Technical Data sheet

PAC Block Nominal Dimensions in mm

Thickness	50-100-150-200-250-300		
Height	200-250		
Length	600		
	Thermal insulation Block	in-fill Block & load-bearing Block	
Density grade	PAC - 2	PAC - 4	PAC - 6
Mean compressive strength (MPa)	2.5	5	7.5
Mean dry density (kg/m³)	400-500	500-600	600-700
Mean working density (kg/m³)	500-600	600-700	700-800
Dimensional tolerance (mm)	± 3.0		
Dry thermal conductivity {w/(m.k) }	≤ 0.11	≤ 0.13	≤ 0.15

Thermal Insulation K Value		0.11	0.13	0.15
100 mm	R-Value	0.91	0.77	0.67
	U-Value	0.93	1.06	1.2
150 mm	R-Value	1.36	1.15	1
	U-Value	0.65	0.76	0.85
200 mm	R-Value	1.82	1.54	1.33
	U-Value	0.5	0.59	0.67
250 mm	R-Value	2.27	1.92	1.67
	U-Value	0.41	0.48	0.54
300 mm	R-Value	2.73	2.31	2
	U-Value	0.35	0.4	0.46
Dry shrinkage (mm/m)		≤ 0.20 %		

Sound Transmission Class (STC)	db	db	db
150 mm	34	37	39
200 mm	39	41	42
250 mm	41	43	45
300 mm	43	45	47

Fire Rating

150 mm	4 Hr	4 Hr	4 Hr
200 mm	4 Hr	4 Hr	4 Hr
250 mm	4 Hr	4 Hr	4 Hr
300 mm	4 Hr	4 Hr	4 Hr

Mortar

Thin Bed Mortar ASTM C270

Thin Bed Mortar ASTM C1660



الشملان للظوايا

AL-Shamlan insulated Block

T: +966 135754041 & F: +966 135759302 &

M: +966 542231000